



AUTOVAC

Industrial
Vacuum & Air Systems

Each Liberty Vacuum System combines an AutoVac vacuum producer and an AutoVac filter separator into one convenient package. Choose from nine different Liberty models varying in size to serve between 1 and 14 users.


As your vacuum producer creates suction it pulls air, dirt and debris from the end user's nozzle, through the vacuum hose, and into the lower half of the filter separator. Here, a precisely engineered cone creates a powerful cyclone that guides debris downward into a waste container.

The air then passes through a series of filter bags in the upper portion of the filter separator. Only clean dry air returns to the vacuum producer. Combine your Liberty Vacuum with engineered piping, support structures and motor controls to complete your central vacuum system.



Liberty Vacuum System, 400 Series


Standard 3 Phase	Model: Standard Performance, 3600 RPM*					
Total Simultaneous Users 15'x1/2" Dia. Vac Hose	HP	Vacuum Frame Dimensions	Weight lbs.	Decibels at 10ft.	Separator Dimensions	Order #
3-4 Users	10HP 3600 RPM	38"	850	70	64"x 30"	114-1032
4-5 Users	15HP 3600 RPM	48"	975	71	64"x 30"	114-1542
5-6 Users	20HP 3600 RPM	48"	1050	72	76"x 30"	114-2052
6-7 Users	25HP 3600 RPM	54"	1200	74	76"x 30"	114-2562

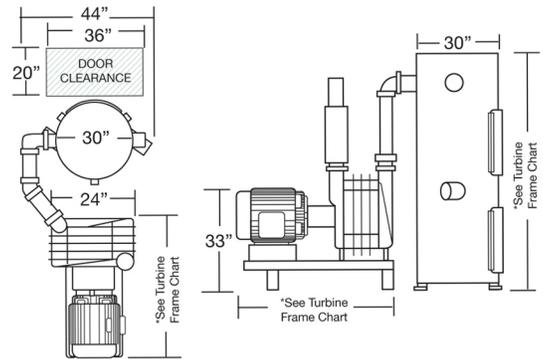

* Please consult your AutoVac sales professional for 50 Hz, 575 volt, and high altitude applications above 3000'. Explosion proof motors available.

Liberty Vacuum System, 600 Series


Standard 3 Phase	Model: Standard Performance, 3600 RPM*					
Total Simultaneous Users 15'x1/2" Dia. Vac Hose	HP	Frame Dimensions	Weight lbs.	Decibels at 10ft.	Separator Dimensions	Order #
8-10 Users	25HP 3600 RPM	60"	1250	72	76"x 30"	116-2562
10-12 Users	30HP 3600 RPM	64"	1300	74	76"x 30"	116-3072
13-14 Users	40HP 3600 RPM	68"	1350	76	76"x 30"	116-3082

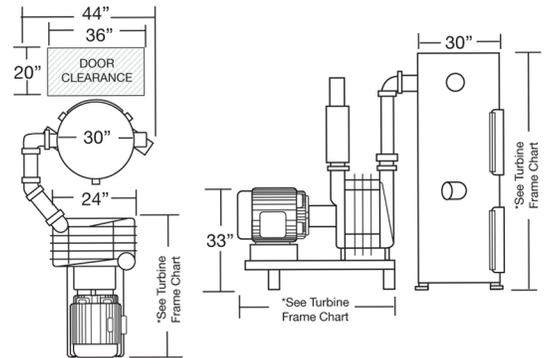

* Please consult your AutoVac sales professional for 50 Hz, 575 volt, and high altitude applications above 3000'. Explosion proof motors available.

Liberty Vacuum System, Direct Drive Series

Standard 3 Phase	Model: Standard Performance, 3600 RPM*					
Total Simultaneous Users 15'x1/2" Dia. Vac Hose	HP	Frame Dimensions	Weight lbs.	Decibels at 10ft.	Separator Dimensions	Order #
3-4 Users	10HP 3600 RPM	32"	725	70	60"x 30"	111-1032
4-5 Users	15HP 3600 RPM	35"	750	71	60"x 30"	111-1542
5-6 Users	20HP 3600 RPM	38"	775	72	60"x 30"	111-2052

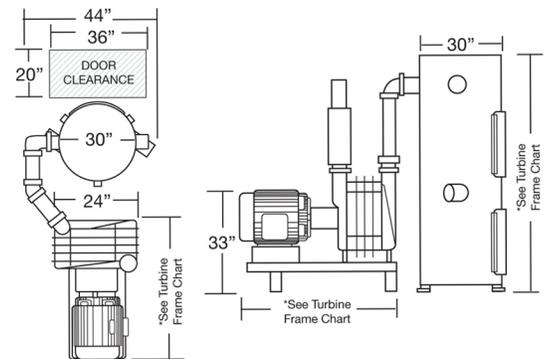

* Please consult your AutoVac sales professional for 50 Hz, 575 volt, and high altitude applications above 3000'. Explosion proof motors available.